

Captivate

A Complete LED Display Solution

Try our new 4K model for brighter colors, deeper contrast and sharper images.

- · All-in-One Solution
- · Easy Setup

 White Glove Installation Available


- · 2.0" System Depth
- Native HD and 4K Resolutions
- Direct LCD Wall Replacement



www.nanolumens.com

Nanolumens

Nanolumens' collaboration-ready display solution redefines simplicity in digital signage by merging the familiar sizing of traditional LCD video walls with the seamless performance of next-generation LED technology. Engineered for rapid deployment and intuitive operation, this All-in-One (AlO) system features a user-friendly interface that makes setup and collaboration quick and hassle-free. Built-in software supports wireless screen sharing, digital signage, and real-time collaboration—making it ideal for conference rooms, control centers, and interactive public spaces. Over-the-air (OTA) updates ensure the system remains current with evolving features and support.

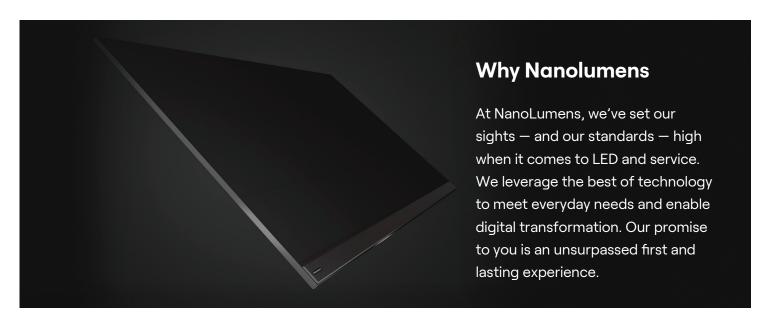

NIXEL™ to Pixel Warranty

Your display is engineered to pass the ultimate test: time. We use high-performing materials like gold wiring to ensure your display is a worthwhile investment. Our Warranty coverage starts pixel one ensuring your display is covered 100% from our Atlanta headquarters.



Benefits

Turnkey Solution

All-in-one solution that combines display, mount, and remote control into one easy to install unit.

Minimize Facility impact

Power consumption taken seriously the Capitave display features a low power eco mode and curated backgrounds to minimize power consumption.

Perfectly Tailored Sizes

3 curated sizes, ranging from HD to 4k, that match LCD wall footprints making your upgrade easy.

Easy Integration & White Glove Service

Installation is a breeze whether you are installing on a wall or with the optional rolling floor stand.



SPECIFICATIONS: Captivate			
Display Size	Captivate 135-HD	Captivate 165-HD	Captivate 162-UHD
SKU	NLID-40006	NLID-40007	NLID-40008
Architecture	COB-MiniLED	SMD	COB-MiniLED
Display Resolution	1920 x 1080p (HD)		3840 x 2160 (UHD)
Display Diagonal	135"	165"	162"
Pixel Pitch	1.5	1.9	0.9
"Full HD"	Yes		UHD
Overall Size (WXH)	3030.0 x 1812.0 mm 119.30 x 71.34 in	3690 x 2183 mm 145.28 x 85.95 in	3630.8 x 2150.4 mm 142.95 x 84.67 in
System Depth	2.2 in / 55.9 mm		
Weight (not including mount/ stand)	243 lbs / 110kg	380 lbs / 172 kg	342 lbs / 155 kg
Max Brightness (standard)		600	
QTY 120v20a AC Circuits	1	2	
Consumption (Watts)	1460 Max 480 Avg	2450 Max 731 Avg	2154 Max 647 Avg
Consumption in Standby (Watts)		0.5W	
Viewing Angle Max	165 horizontal 165 vertical	160 horizontal 140 vertical	165 horizontal 165 vertical
Refresh Rate	3840 hz		
Curvable	No		
Serviceability Indoor/Outdoor	Front		
Input Voltage (VAC)	120/208/220/240v		
Input Bit Depth	8 bit /60 Hz		
Lifetime	>100,000 Hours		
Operating System	Android 13.0		
Remote Control	Yes		
Audio	Yes (6 Speaker)		
HDMI Inputs	(1) HDMI 2.0 and (2) HDMI 1.4		
Operating Temperature	Operating: -10 to 40C, 10-80% Non Condensing Humidity		
Floor Stand Part #	NLTK-40001		



