





NIXEL SERIES™ FLEX

Indoor displays engineered for the perfect curve and mount-free fit.

- Flat or True Curve™
- 0.9–9.5mm Pixel Pitch
- Indoor
- Customizable
- 100K Lifetime
- TAA Compliant

At Nanolumens, we've set our sights—and our standards—high when it comes to LED and service. We leverage the best technology to meet everyday needs and enable digital transformation. Our promise to you is an unsurpassed first and lasting experience.

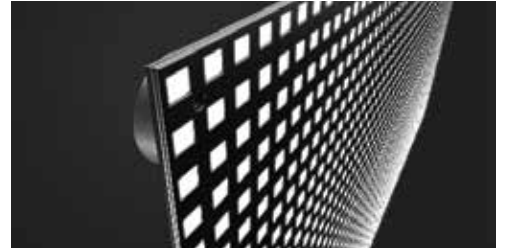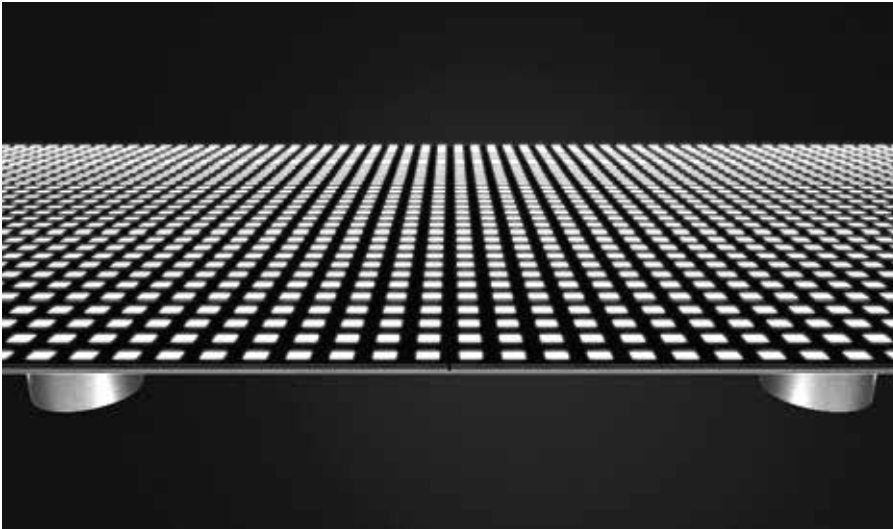

Why Nanolumens

At Nanolumens, we've set our sights — and our standards — high when it comes to LED and service. We leverage the best of technology to meet everyday needs and enable digital transformation. Our promise to you is an unsurpassed first and lasting experience.

NIXEL™ to Pixel Warranty

Your display is engineered to pass the ultimate test: time. We use high-performing materials like gold wiring to ensure your display is a worthwhile investment. Our Warranty coverage starts pixel one ensuring your display is covered 100% from our Atlanta headquarters.

Benefits

True Curve Technology

Seamless and able to produce complex curves and unique shaped designs that allow for limitless design freedom.

Standard or Completely Customizable

Seamless and able to produce complex, unique shaped displays to fit tight or difficult spaces.

Uncompromising Quality Components

Maximize your ROI with your investment in superior components like gold wiring.

Patented Frame and Skin Topology

Each display is built-to-suit any application desired. Custom right down to the installation.

SPECIFICATIONS: NIXEL SERIES™ (FLEX)

Pixel Pitch	0.93mm	1.25mm	1.56mm	1.87mm	2.5mm	3mm	4mm	6mm	9mm	
Module Size (W X H)¹	300 x 168.8 mm 11.81 x 6.64 in	300 x 168.8 mm 11.81 x 6.64 in	300 x 168.8 mm 11.81 x 6.64 in	240 x 150 mm 9.45 x 5.91 in	304.8 mm x 152.4 mm 12.0 x 6.0 in					
Module array per "Full HD"	6x6	8x8	10x10	12x12	20x18	24x27	30x34 ²	40x45	60x68 ²	
Module Resolution	320x180	240x135	192x108	160x90	96x60	80x40	64x32	48x24	32x16	
Module Depth³	104.9 mm / 4.13 in									
Watts/ft²	52Max 18 Avg	67.8 Max 20.4 Avg	67.9 Max 20.4 Avg	75 Max 25 Avg	56.41 Max 16.92 Avg	44.05 Max 13.22 Avg	48.05 Max 14.41 Avg	41.82 Max 12.60 Avg	41.82 Max 12.55 Avg	
Weight/ft²	10.4 lb/ft ² 4.65 lb/ft ²	5.1 lbs / 2.31 kg				5.5 lbs / 2.49 kg				
Max Brightness (standard)⁴	1000nits	770nits	750nits	800nits		980nits	1190nits	1800nits		
Viewing Angle Max⁵	178° horizontal / 178° vertical									
Viewing Angle L50⁵	170° H 165° V	170° H 170° V	160° H 160° V			160° H 140° V	160° H 160° V	170° H 160° V		
Minimum Radius⁶	1829 mm / 72 in	915 mm / 36 in	762 mm / 30 in		610 mm / 24 in			458 mm / 18 in		
Serviceability	Front									
Indoor/Outdoor	Indoor									
Input Voltage (VAC)	110 / 120 / 208 / 220 / 240 VAC - Single Phase									
Output Bit Depth⁷	8-bit Standard (16.7 Million) / Up to 10-bit (>1 Billion)									
Lifetime	>100,000 hours									
Warranty	6 Year / Extendable to 10									
Operating Temperature	Operating: 0 to 50C, Non Condensing Humidity									

1 Nixel™ footprint, bespoke sheet metal frame adds 1/2" to overall system height and width

2 This product does not array to exactly 1920x1080

3 Nixel Series™ standard system depth is overall depth of frame+skin topology including finish decor/trim

4 Higher brightnesses are possible through additional customization

5 L50 is objective measured angle at which brightness decreases to 50% of max brightness

6 Minimum Diameter is based on standard framework and components – tighter radii are possible through additional customization

7 Nixel Series™ LED displays process at up to 14 bits per channel internally. Final output bit depth is limited by content source capabilities.

Designed, Engineered, Assembled, Supported and Serviced in the USA

